

NEWS FOR THE ELECTRONICS INDUSTRY

element14
AN AVNET COMPANY

eTECH JOURNAL

ISSUE 17



THE *INTELLIGENT* SKY

ENGINEERING THE NEXT WAVE OF AERIAL INTELLIGENCE

AERIAL VEHICLE
SYSTEMS

+

BUILDING HIGH
PERFORMANCE
ROBOTIC VISION

AUTONOMOUS
DRONE ECONOMY


NEXT-GEN ELECTRONIC
SPEED CONTROLLERS
(ESC)

Solutions for Commercial Drone

molex

Commercial drones are evolving to carry more sensors, process more data and operate longer within severe size and weight constraints. While the scale and purpose of drones may vary—from lightweight craft for aerial photography to heavy-lift, high-power Unmanned Aerial Vehicles (UAVs) for agriculture or delivery—designs increasingly require compact interconnects capable of handling high-speed data and power while standing up to environmental stress.

Molex addresses this need with space-saving, sealed board-to-board and power-and-signal connectors engineered for durability, precision and performance in demanding aerial applications.



MOLEX INNOVATIVE SOLUTIONS FOR COMMERCIAL DRONES

Wire-to-Board Solutions	SlimStak Connectors	High-Power Solutions	Signal/Low Power Cables
Key Features			
Color-coded options	Robustness and floating versions	Broad product offering	Discrete wiring options
Positive locking mechanism	Dual contact design	High voltage and high current combined with positive locking mechanism	Durable overmold design
Enhanced contact protection	Microminiature		Pre-crimped leads
Resin enhancements	High power versions		Customizable cable solutions

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners

EXPLORE MORE



CONTENTS

WELCOME



- 04 AERIAL VEHICLE SYSTEMS
- 08 BUILDING HIGH PERFORMANCE ROBOTIC VISION
- 15 AUTONOMOUS DRONE ECONOMY
- 20 NEXT-GEN ELECTRONIC SPEED CONTROLLERS (ESC)

The world of drones is evolving rapidly, transforming from remotely piloted aircraft into intelligent systems capable of sensing, analysing, and responding to their surroundings in real time. What once focused primarily on flight control and navigation is now becoming a sophisticated ecosystem where advanced sensors, machine vision, edge computing, AI, and high-speed connectivity work together to enable new levels of autonomy and performance.

This transformation is driven by the convergence of embedded processing, sensor fusion, intelligent control systems, and advances in power electronics. From infrastructure inspection and precision agriculture to logistics, public safety, and industrial automation, modern UAVs are no longer just airborne platforms. They are becoming intelligent tools capable of making decisions, adapting to changing environments, and delivering valuable insights where they are needed most.

In this edition of **eTechJournal**, “**THE INTELLIGENT SKY,**” we explore the technologies powering this next generation of aerial intelligence. From autonomous drone architectures and robotic vision systems to sensor fusion, AI-enabled flight control, and next-generation electronic speed controllers, we examine how engineers are building smarter, more capable, and more reliable airborne systems.

The future of aviation is not simply connected or autonomous. It is intelligent. As aerial systems continue to evolve, the focus shifts from controlling flight to enabling platforms that can perceive, learn, and act with increasing independence. Let’s explore the technologies shaping the future of the intelligent sky.



Ankur Tomar Editor, eTech Journal
Email: editor-TJ@element14.com

To register for all future editions and to access all back issues of eTech Journal, please [click here](#)

Editor-in-chief: Cliff Ortmeier, Managing Editor: Ankur Tomar

©Premier Farnell. All rights reserved. No portion of this publication, whether in whole or in part, can be reproduced without the express written consent of Premier Farnell. All other registered and/or unregistered trademarks displayed in this publication constitute the intellectual property of their respective holders. Errors and omissions in the printing of this magazine shall not be the responsibility of Premier Farnell. Premier Farnell reserves the right to make such corrections as may be necessary to the prices contained herein.



VISIT MICROCHIP



MICROCHIP TECHNOLOGIES ENABLING NEXT GENERATION UNMANNED AERIAL VEHICLE SYSTEMS

Unmanned aerial vehicles have transitioned from niche platforms into highly capable, mission critical systems used across commercial, industrial, and military domains. Today's drones are expected to deliver autonomous operation, high bandwidth sensing, secure communications, and extended endurance, all within tightly constrained size, weight, power, and cost envelopes.

For design engineers, this evolution demands a fundamentally system-oriented approach to electronics architecture—one that tightly integrates control, connectivity, power management, and security.

Modern UAVs are no longer defined solely by their airframes or propulsion systems. Instead, they are defined by how efficiently data moves through the platform, how intelligently power is managed, and how securely the system can operate in both benign and contested environments.

Microchip's technology portfolio directly addresses these needs by enabling scalable, secure, and power efficient UAV architectures that support both commercial innovation and long-life defense programs.

SYSTEM LEVEL CHALLENGES IN UAV DESIGN

At a high level, UAV electronics can be divided into several tightly coupled subsystems: propulsion and motor control, flight control and navigation, payload processing, communications, and power management. Each of these subsystems imposes competing requirements. Motor drives demand high current and fast control loops, while sensors and radios require low noise power rails. High resolution cameras and radar generate massive data streams that must be transported and processed with minimal latency, even as the platform remains airborne for as long as possible.

Environmental stress further complicates design. Vibration, electromagnetic interference, and wide temperature ranges are normal operating conditions rather than edge cases. Military UAVs add additional constraints, including resistance to tampering, secure boot and communication, and guaranteed component availability over long program lifetimes. Even commercial drones increasingly face regulatory requirements related to cybersecurity, especially as operations move beyond visual line of sight. Meeting these challenges requires more than discrete component selection. It requires coherent system integration, where processing, networking, and power are architected together rather than optimized in isolation.

HETEROGENEOUS PROCESSING AND SYSTEM INTEGRATION

A defining characteristic of modern UAV electronics is the move toward heterogeneous processing. Instead of relying on a single processor to handle all tasks, designers distribute workloads across microcontrollers, digital signal controllers, application processors, and programmable logic. This approach improves determinism, enables parallel processing, and allows safety critical functions to be isolated from high level mission software.

Microchip's microcontrollers and digital signal controllers are ideal for real-time control applications like motor control and power conversion. Devices like dsPIC digital signal controllers integrate high speed ADCs, fast comparators, and high resolution PWM modules alongside a 32-bit DSP engine. This combination enables advanced motor control algorithms such as field-oriented control, flux weakening, and regenerative braking. For UAV designers, these capabilities translate into higher propulsion efficiency, smoother flight dynamics, reduced acoustic noise, and lower thermal stress—all critical factors in airborne platforms.

At the higher end of integration, Microchip's PolarFire SoC FPGAs enable consolidation of processing, control, and high speed data movement into a single device. These platforms combine low power FPGA fabric with a hardened, multi core RISC V processor subsystem, allowing Linux based applications to coexist with real time logic and deterministic data paths. This architecture is particularly valuable in UAV payload systems, where sensor fusion, encryption, video processing, and custom acceleration must operate concurrently without compromising power efficiency.

ETHERNET AS THE UAV COMMUNICATIONS BACKBONE

One of the most significant architectural shifts in larger UAV design is the growth of Ethernet as a primary communications backbone. Traditional point to point interfaces such as UART, SPI, and proprietary links remain useful for low level control, but they do not scale well for high bandwidth payloads or distributed system architectures.

Ethernet offers a standardized, high bandwidth, and interoperable solution for moving data throughout the UAV. Internally, it enables deterministic communication between flight computers, payload processors, storage devices, and sensors.

High speed Ethernet links can transport video and sensor data with low latency, while time sensitive networking techniques ensure that control critical traffic remains predictable.

Single Pair Ethernet is particularly attractive in airborne platforms. SPE cuts wiring down to one twisted pair, reducing weight and complexity but keeping Ethernet's reliability. This makes it feasible to extend Ethernet connectivity deeper into the airframe, reaching distributed sensors and subsystems without the penalties associated with traditional multi pair cabling.

Microchip's Ethernet PHYs, switches, and FPGA based Ethernet bridges allow designers to implement flexible network topologies tailored to UAV requirements. For example, high speed camera sensors using interfaces such as MIPI can be bridged to Ethernet and connected to centralized processing platforms.

By separating sensor placement from computing resources, it becomes easier to integrate mechanical systems and enables modular payload configurations. In both commercial and military UAVs, such modularity enables faster reconfiguration for different missions.

Ethernet can also serve as a natural aggregation layer for wireless communication systems. Internally, data from multiple subsystems can be consolidated over Ethernet and handed off to radios for ground communication, swarm coordination, or satellite links. This convergence simplifies software integration and allows designers to leverage standard networking tools and protocols.

POWER MANAGEMENT AND ENERGY EFFICIENCY

Power management is a central concern in UAV design because it directly affects endurance, payload capability, and reliability. Efficient power conversion, intelligent sequencing, and system level monitoring are essential to extracting maximum performance from limited energy sources.

Microchip's power management solutions support this need through integrated PMICs, DC/DC converters, and supervisory devices designed for complex, multi-rail systems. By integrating multiple regulated outputs, sequencing logic, and protection features into single devices, these solutions reduce component count and board area while improving efficiency. This integration is especially valuable in processor based payloads and flight computers, where multiple voltage domains must be powered up and down in a controlled manner.

Power management is also closely tied to the engine control system. Advanced control techniques not only improve propulsion efficiency but also reduce thermal stress on electronic speed controllers and motors. While regenerative energy recovery may be limited in aerial platforms, the improved braking and deceleration control enhance maneuverability and contribute to overall system robustness.

SECURE NAVIGATION AND COMMUNICATIONS

As UAVs become more autonomous and connected, security is no longer optional. Navigation systems based on GNSS are vulnerable to interference and spoofing, and communication links are potential attack surfaces. Both commercial and military drones must ensure the integrity of navigation data, control commands, and mission software.

Microchip addresses these concerns through a combination of GNSS technologies, secure elements, and hardware-based cryptography. Secure boot, encrypted firmware updates, and hardware root of trust mechanisms protect the platform from unauthorized modification.

When combined with authenticated communication channels, these features help ensure that UAVs operate as intended, even in challenging environments. For military platforms, such hardware rooted security is essential to meeting mission assurance requirements. For commercial drones, it supports regulatory compliance and safe operation in shared airspace, particularly for beyond visual line of sight missions.

SCALABLE SOLUTIONS FOR COMMERCIAL AND MILITARY UAVS

A key strength of Microchip's portfolio is its scalability across UAV classes and markets. Devices are available with extended temperature support, long term availability, and pin compatible families, allowing engineers to reuse designs and migrate across performance levels with minimal redesign. This is particularly valuable in aerospace and defense programs, where platforms must remain supportable for decades, but it also benefits commercial manufacturers seeking to rapidly evolve product lines.

By enabling reuse of architectures across small, medium, and large UAVs, Microchip technologies reduce development risk and accelerate time to deployment. Engineers can focus on system optimization and mission differentiation rather than reinventing foundational electronics with each new platform.

CONCLUSION

The future of unmanned aerial vehicles is defined by integration. Higher autonomy, richer payloads, and secure connectivity all depend on electronics architectures that efficiently combine processing, networking, power management, and security. The challenges facing UAV designers—stringent SWaP constraints, high data rates, and increasing cybersecurity requirements—demand solutions that operate at the system level rather than as isolated components.

Microchip's portfolio enables this system-level approach. Through low power heterogeneous processing, Ethernet based communications including Single Pair Ethernet, advanced motor control and power management, secure GNSS and communication technologies, and FPGA based integration, Microchip provides the building blocks for scalable, future ready UAV platforms. For design engineers, these technologies form a cohesive foundation for creating drones that are not only more capable, but also more reliable, secure, and adaptable to the rapidly evolving demands of both commercial and military applications.

[CLICK HERE](#)

KAINAN WANG,
SYSTEMS APPLICATIONS ENGINEER

BUILDING HIGH PERFORMANCE ROBOTIC VISION WITH GMSL



Robotic systems increasingly rely on vision to perceive and interact with their environment, creating growing demands for high speed, low latency data links.

Gigabit Multimedia Serial Link (GMSL™) offers a promising solution by transmitting video, control signals, and power over a single cable with high reliability.

This article examines how cameras are deployed in robotics, the connectivity challenges they face, and how GMSL can enable scalable, robust, and performance-driven robotic platforms.

INTRODUCTION

Robotic systems increasingly depend on advanced machine vision to perceive, navigate, and interact with their environment. As both the number and resolution of cameras grow, the demand for high speed, low latency links capable of transmitting and aggregating real-time video data has never been greater.

Gigabit Multimedia Serial Link (GMSL™), originally developed for automotive applications, is emerging as a powerful and efficient solution for robotic systems. GMSL transmits high speed video data, bidirectional control signals, and power over a single cable, offering long cable reach, deterministic microsecond-level latency with extremely low bit error rate (BER).

It simplifies the wiring harness and reduces the total solution footprint, ideal for vision-centric robots operating in dynamic and often harsh environments.

The following sections discuss where and how cameras are used in robotics, the data and connectivity challenges these applications face, and how GMSL can help system designers build scalable, reliable, and high performance robotic platforms.

WHERE ARE CAMERAS USED IN ROBOTICS?

Cameras are at the heart of modern robotic perception, enabling machines to understand and respond to their environment in real time. Whether it's a warehouse robot navigating aisles, a robotic arm sorting packages, or a service robot interacting with people, vision systems are critical for autonomy, automation, and interaction.

These cameras are not only diverse in function but also in form—mounted on different parts of the robot depending on the task and tailored to the physical and operational constraints of the platform (see Figure 1).

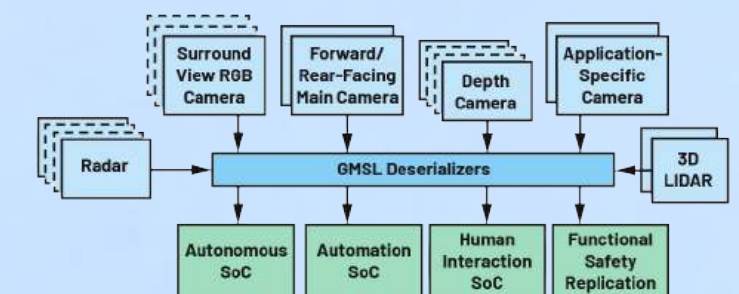


Figure 1: Example multimodal robotic vision system enabled by GMSL.

AUTONOMY

In autonomous robotics, cameras serve as the eyes of the machine, allowing it to perceive its surroundings, avoid obstacles, and localize itself within an environment. For mobile robots—such as delivery robots, warehouse shuttles, or agricultural rovers—this often involves a combination of wide field-of-view cameras placed at the corners or edges of the robot. These surround-view systems provide 360° awareness, helping the robot navigate complex spaces without collisions.

Other autonomy-related applications use cameras facing downward or upward to read fiducial markers on floors, ceilings, or walls. These markers act as visual signposts, allowing robots to recalibrate their position or trigger specific actions as they move through structured environments like factories or hospitals.

In more advanced systems, stereo vision cameras or time of flight (ToF) cameras are placed on the front or sides of the robot to generate three-dimensional maps, estimate distances, and aid in simultaneous localization and mapping (SLAM).

The location of these cameras is often dictated by the robot’s size, mobility, and required field of view. On small sidewalk delivery robots, for example, cameras might be tucked into recessed panels on all four sides. On a drone, they’re typically forward-facing for navigation and downward facing for landing or object tracking.

AUTOMATION

In industrial automation, vision systems help robots perform repetitive or precision tasks with speed and consistency. Here, the camera might be mounted on a robotic arm—right next to a gripper or end-effector—and the system can visually inspect, locate, and manipulate objects with high accuracy.

This is especially important in pick-and-place operations, where identifying the exact position and orientation of a part or package is essential.

Other times, cameras are fixed above a work area—mounted on a gantry or overhead rail—to monitor items on a conveyor or to scan barcodes. In warehouse environments, mobile robots use forward-facing cameras to detect shelf labels, signage, or QR codes, enabling dynamic task assignments or routing changes.

Some inspection robots, especially those used in infrastructure, utilities, or heavy industry, carry zoom-capable cameras mounted on masts or articulated arms. These allow them to capture high resolution imagery of weld seams, cable trays, or pipe joints—tasks that would be dangerous or time-consuming for humans to perform manually.

HUMAN INTERACTION

Cameras also play a central role in how robots engage with humans. In collaborative manufacturing, healthcare, or service industries, robots need to understand gestures, recognize faces, and maintain a sense of social presence. Vision systems make this possible.

Humanoid and service robots often have cameras embedded in their head or chest, mimicking the human line of sight to enable natural interaction. These cameras help the robot interpret facial expressions, maintain eye contact, or follow a person’s gaze. Some systems use depth cameras or fisheye lenses to track body movement or detect when a person enters a shared workspace.

In collaborative robot (cobot) scenarios, where humans and machines work side by side, machine vision is used to ensure safety and responsiveness. The robot may watch for approaching limbs or tools, adjusting its behavior to avoid collisions or pause work if someone gets too close.

Even in teleoperated or semi-autonomous systems, machine vision remains key. Front-mounted cameras stream live video to remote operators, enabling real-time control or inspection. Augmented reality overlays can be added to this video feed to assist with tasks like remote diagnosis or training.

Across all these domains, the camera’s placement—whether on a gripper, a gimbal, the base, or the head of the robot—is a design decision tied to the robot’s function, form factor, and environment. As robotic systems grow more capable and autonomous, the role of vision will only deepen, and camera integration will become even more sophisticated and essential.

ROBOTICS VISION CHALLENGES

As vision systems become the backbone of robotic intelligence, opportunity and complexity grow in parallel. High performance cameras unlock powerful capabilities—enabling real-time perception, precise manipulation, and safer human interaction—but they also place growing demands on system architecture.

It’s no longer just about moving large volumes of video data quickly. Many of today’s robots must make split-second decisions based on multimodal sensor input, all while operating within tight mechanical envelopes, managing power constraints, avoiding electromagnetic interference (EMI), and maintaining strict functional safety in close proximity to people.

These challenges are compounded by the environments robots face. A warehouse robot may shuttle in and out of freezers, enduring sudden temperature swings and condensation. An agricultural rover may crawl across unpaved fields, absorbing constant vibration and mechanical shock. Service robots in hospitals or public spaces may encounter unfamiliar, visually complex settings, where they must quickly adapt to safely navigate around people and obstacles.

SOLVE THE CHALLENGES WITH GMSL

GMSL is uniquely positioned to meet the demands of modern robotic systems. The combination of bandwidth, robustness, and integration flexibility makes it well suited for sensor-rich platforms operating in dynamic, mission-critical environments. The following features highlight how GMSL addresses key vision-related challenges in robotics.

HIGH DATA RATE AND LOW LATENCY

The GMSL2™ and GMSL3™ product families support forward-channel (video path) data rates of 3 Gbps, 6 Gbps, and 12 Gbps, covering a wide range of robotic vision use cases. These flexible link rates allow system designers to optimize for resolution, frame rate, sensor type, and processing requirements (Figure 2).

A 3 Gbps link is sufficient for most surround view cameras using 2 MP to 3 MP rolling shutter sensors at 60 frames per second (FPS). It also supports other common sensing modalities, such as ToF sensors and light detection and ranging (LIDAR) units with point-cloud outputs and radar sensors transmitting detection data or compressed image-like returns.

The 6 Gbps mode is typically used for the robot’s main forward-facing camera, where higher resolution sensors (usually 8 MP or more) are required for object detection, semantic understanding, or sign recognition. This data rate also supports ToF sensors with raw output, or stereo vision systems that either stream raw output from two image sensors or output processed point cloud stream from an integrated image signal processor (ISP). Many commercially available stereo cameras today rely on this data rate for high frame-rate performance.

At the high end, 12 Gbps links enable support for 12 MP or higher resolution cameras used in specialized robotic applications that demand advanced object classification, scene segmentation, or long-range perception. Interestingly, even some low resolution global shutter sensors require higher speed links to reduce readout time and avoid motion artifacts during fast capture cycles, which is critical in dynamic or high speed environments.

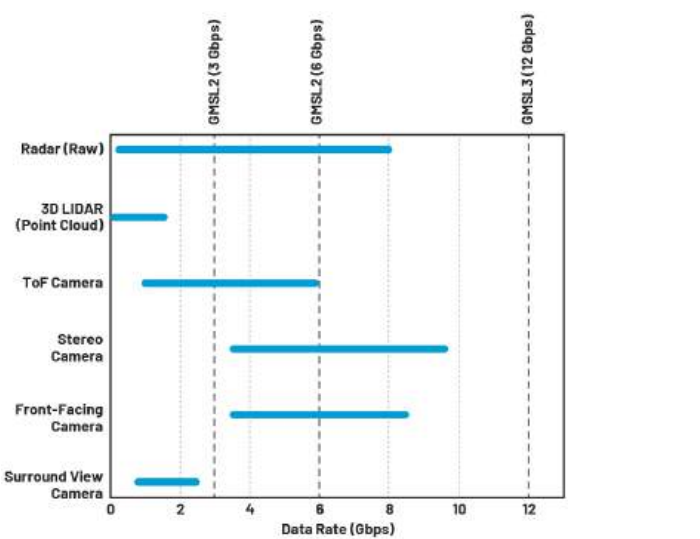


Figure 2. Sensor bandwidth ranges with GMSL capabilities

Because GMSL uses frequency-domain duplexing to separate the forward (video and control) and reverse (control) channels, it enables bidirectional communication with low and deterministic latency, without the risk of data collisions. Across all link rates, GMSL maintains impressively low latency: the added delay from the input of a GMSL serializer to the output of a deserializer typically falls in the lower tens of microseconds—negligible for most real-time robotic vision systems. The deterministic reverse-channel latency enables precise hardware triggering from the host to the camera—critical for synchronized image capture across multiple sensors, as well as for time-sensitive, event-driven frame triggering in complex robotic workflows. Achieving this level of timing precision with USB or Ethernet cameras typically requires the addition of a separate hardware trigger line, increasing system complexity and cabling overhead.

SMALL FOOTPRINT AND LOW POWER

One of the key value propositions of GMSL is its ability to reduce cable and connector infrastructure. GMSL itself is a full-duplex link, and most GMSL cameras utilize the power-over-coax (PoC) feature, allowing video data, bidirectional control signals, and power to be transmitted over a single thin coaxial cable. This significantly simplifies wiring, reduces the overall weight and bulk of cable harnesses, and eases mechanical routing in compact or articulated robotic platforms (Figure 3).

In addition, the GMSL serializer is a highly integrated device that combines the video interface (for example, MIPI-CSI) and the GMSL PHY into a single chip. The power consumption of the GMSL serializer, typically around 260 mW in 6 Gbps mode, is favorably low compared to alternative technologies with similar data throughput. All these features will translate to smaller board areas, reduced thermal management requirements (often eliminating the need for bulky heatsinks), and greater overall system efficiency, particularly for battery-powered robots.

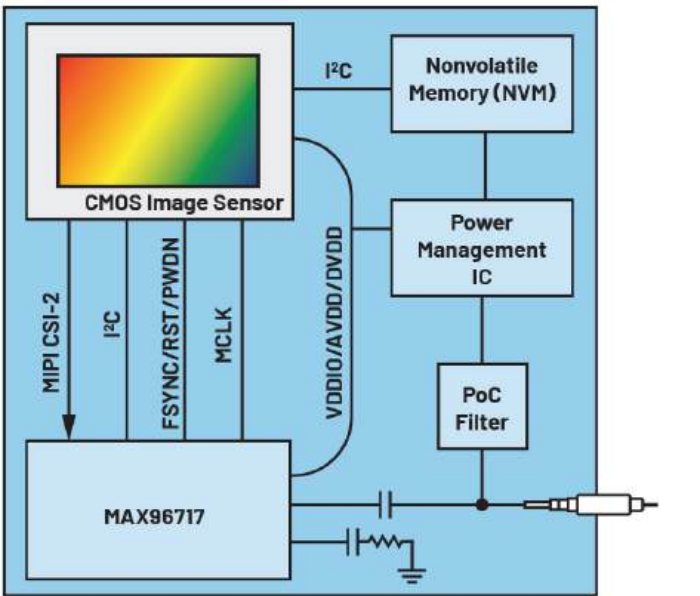


Figure 3. A typical GMSL camera architecture using the MAX96717

SENSOR AGGREGATION AND VIDEO DATA ROUTING

GMSL deserializers are available in multiple configurations, supporting one, two, or four input links, allowing flexible sensor aggregation architectures. This enables designers to connect multiple cameras or sensor modules to a single processing unit without additional switching or external muxing, which is especially useful in multicamera robotics systems.

In addition to the multiple inputs, GMSL SERDES also supports advanced features to manage and route data intelligently across the system. These include:

- I2C and GPIO broadcasting for simultaneous sensor configuration and frame synchronization.
- I2C address aliasing to avoid I2C address conflict in passthrough mode.
- Virtual channel reassignment, allowing multiple video streams to be mapped cleanly into the frame buffer inside the systems on chip (SoCs).
- Video stream duplication and virtual channel filtering, enabling selected video data to be delivered to multiple SoCs—for example, to support both automation and interaction pipelines from the same camera feed or to support redundant processing paths for enhanced functional safety.

SAFETY AND RELIABILITY

Originally developed for automotive advanced driver assistance systems (ADAS) applications, GMSL has been field-proven in environments where safety, reliability, and robustness are non-negotiable. Robotic systems, particularly those operating around people or performing mission-critical industrial tasks, can benefit from the same high standards.

TABLE 1. GMSL VS. USB VS. ETHERNET: TRADE-OFFS IN ROBOTIC VISION

Feature/ Criteria	GMSL (GMSL2/ GMSL3)	USB (for example, USB 3.x)	Ethernet (for example, GigE Vision)
Cable Type	Single coax or STP (data + power + control)	Separate USB + power + general-purpose input/output (GPIO)	Separate Ethernet + power (PoE optional) + GPIO
Max Cable Length	15+ meters with coax	3 m reliably	100 m with Cat5e/Cat6
Power Delivery	Integrated (PoC)	Requires separate or USB-PD	Requires PoE infrastructure or separate cable
Latency (Typical)	Tens of microseconds (deterministic)	Millisecond-level, OS-dependent	Millisecond-level, buffered + OS/network stack
Data Rate	3 Gbps/6 Gbps/12 Gbps (uncompressed, per link)	Up to 5 Gbps (USB 3.1 Gen 1)	1 Gbps (GigE), 10 Gbps (10 GigE, uncommon in robotics)
Video Compression	Not required (raw or ISP output)	Often required for higher resolutions	Often required
Hardware Trigger Support	Built-in via reverse channel (no extra wire)	Requires extra GPIO or USB communications device class (CDC) interface	Requires extra GPIO or sync box
Sensor Aggregation	Native via multi-input deserializer	Typically point-to-point	Typically point-to-point
EMI Robustness	High—designed for automotive EMI standards	Moderate	Moderate to high (depends on shielding, layout)
Environmental Suitability	Automotive-grade temp, ruggedized	Consumer-grade unless hardened	Varies (industrial options exist)

Software Stack	Direct MIPI-CSI integration with SoC	OS driver stack + USB video device class (UVC) or proprietary software development kit (SDK)	OS driver stack + GigE Vision/ GenICam
Functional Safety Support	ASIL-B devices, data replication, deterministic sync	Minimal	Minimal
Deployment Ecosystem	Mature in ADAS, growing in robotics	Broad in consumer/ PC, limited industrial options	Mature in industrial vision
Integration Complexity	Moderate—requires SERDES and routing config	Low—plug and play for development High—for production	Moderate—needs switch/router config and sync wiring

Most GMSL serializers and deserializers are qualified to operate across a -40°C to +105°C temperature range, with built-in adaptive equalization that continuously monitors and adjusts transceiver settings in response to environmental changes. This provides system architects with the flexibility to design robots that function reliably in extreme or fluctuating temperature conditions.

In addition, most GMSL devices are ASIL-B compliant and exhibit extremely low BERs. Under compliant link conditions, GMSL2 offers a typical BER of 10-15, while GMSL3, with its mandatory forward error correction (FEC), can reach a BER as low as 10-30. This exceptional data integrity, combined with safety certification, significantly simplifies system-level functional safety integration.

Ultimately, GMSL’s robustness leads to reduced downtime, lower maintenance costs, and greater confidence in long-term system reliability—critical advantages in both industrial and service robotics deployments.

MATURE ECOSYSTEM

GMSL benefits from a mature and deployment-ready ecosystem, shaped by years of high volume use in automotive systems and supported by a broad network of global ecosystem partners. This includes a comprehensive portfolio of evaluation and production-ready cameras, compute boards, cables, connectors, and software/driver support—all tested and validated under stringent real-world conditions. For robotics developers, this ecosystem translates to shorter development cycles, simplified integration, and a lower barrier to scale from prototype to production.

GMSL VS. LEGACY ROBOTICS VISION CONNECTIVITY

In recent years, GMSL has become increasingly accessible beyond the automotive industry, opening new possibilities for high performance robotic systems. As the demands on robotic vision grow with more cameras, higher resolution, tighter synchronization, and harsher environments, traditional interfaces like USB and Ethernet often fall short in terms of bandwidth, latency, and integration complexity.

GMSL is now emerging as a preferred upgrade path, offering a robust, scalable, and production-ready solution that is gradually replacing USB and Ethernet in many advanced robotics platforms. Table 1 compares the three technologies across key metrics relevant to robotic vision design.

CONCLUSION

As robotics moves into increasingly demanding environments and across diverse use cases, vision systems must evolve to support higher sensor counts, greater bandwidth, and deterministic performance. While legacy connectivity solutions will remain important for development and certain deployment scenarios, they introduce trade-offs in latency, synchronization, and system integration that limit scalability. GMSL, with its combination of high data rates, long cable reach, integrated power delivery, and bidirectional deterministic low latency, provides a proven foundation for building scalable robotic vision systems. By adopting GMSL, designers can accelerate the transition from prototype to production, delivering smarter, more reliable robots ready to meet the challenges of a wide range of real-world applications.

CLICK HERE



ABOUT THE AUTHOR

Kainan Wang is a systems applications engineer in the Automotive Business Unit at Analog Devices in Wilmington, Massachusetts. He joined ADI in 2016 after receiving an M.S. in electrical engineering from Northeastern University in Boston, Massachusetts. Kainan has been working with 2D/3D imaging solutions from hardware development and systems integrations to applications development. Most recently, his work focus is to expand ADI automotive technologies into other markets beyond automotive.

DEVKIT^{HQ}

The #1 Destination
for Embedded Evaluation Boards,
Development Kits, and Single
Board Computers.



FIND YOUR NEXT DEVELOPMENT KIT NOW



LEARN MORE



THE CORE TECHNOLOGIES POWERING THE AUTONOMOUS DRONE ECONOMY

The global drone technology landscape has shifted from prototyping to scalable, mission-critical deployments. Today, industrial Unmanned Aerial Vehicle (UAV) platforms for infrastructure inspection, precision agriculture, logistics, and specialized surveillance are evaluated by their stability, precision, and reliability in demanding real-world conditions, rather than by airframe design or speed.

For engineers and system architects, drone performance is no longer a mechanical problem; it is a sensing and control challenge. The sensing layer and control algorithms determine whether a drone simply flies or operates reliably in real-world environments.

As the sector expands, competitive advantage is therefore shifting to the "intelligence layer" of the platform. This article explores the core technologies behind this shift, focusing on 6-axis MEMS motion tracking, high-precision encoders, and the sensor-fusion algorithms that integrate them into reliable industrial systems.

KEY TAKEAWAYS

- Multirotors require continuous closed-loop stabilization (typically hundreds of updates per second); sensor quality and latency directly determine controllability.
- IMU drift, mechanical uncertainty (backlash/slip), and GNSS degradation are three dominant real-world failure modes that must be engineered out.
- A 6-axis MEMS IMU provides fast, high-frequency body motion data; optical incremental encoders provide "mechanical ground truth" for gimbals and actuators.
- Sensor fusion (often EKF) combines sensors by weighing them according to modeled noise and uncertainty, improving robustness across vibration, temperature, and GNSS loss.
- Closed-loop encoder feedback can reduce pointing error for gimbals and precision payloads, protecting imaging quality and reducing costly.

AUDIENCE AND SCOPE

This document is intended for UAV engineers, system architects, and technical decision makers designing multirotor platforms for inspection, agriculture, logistics, public safety, and other industrial applications. The focus is on motion sensing, actuator feedback, and state estimation; it does not attempt to cover airframe design, propulsion selection, or regulatory compliance in depth.

1. WHY DRONE STABILITY IS A SENSING AND CONTROL PROBLEM

A multirotor drone is an inherently unstable platform. Unlike fixed-wing aircraft, which can glide, multirotor require continuous high-frequency stabilization to stay airborne. Stability relies on a closed-loop control system operating at 400 to 1000 Hz, which continuously adjusts motor output based on sensor feedback.

However, in practical deployments, three primary failure modes frequently degrade performance:

- **Inertial Measurement Unit (IMU) Drift:** Small errors in orientation that accumulate over time, leading to “toilet-bowling” or navigation errors.
- **Mechanical Uncertainty:** Backlash, motor slip, and load variations that make open-loop commands unreliable for precise tasks.
- **GNSS Degradation:** Signal loss or multipath errors in urban canyons or under tree canopies, where global positioning is obstructed.

An urban canyon (or street canyon) is an artificial environment where a narrow street is bordered by high-rise buildings on both sides, creating a canyon-like effect.

These challenges can be addressed by enhancing mechanical design, incorporating high-fidelity sensing, and applying intelligent data fusion. High-performance systems now require sub-millisecond latency, an IMU noise floor below 0.005°/s/√Hz, gimbal accuracy of ≤ 0.1° rated torque, and vibration immunity across the 10 to 2,000 Hz rotor band.

2. CORE TECHNOLOGY DEEP DIVE: 6-AXIS MEMS MOTION TRACKING

The primary source of motion awareness in any drone is the 6-axis MEMS IMU. This device integrates a 3-axis gyroscope, which measures angular velocity, and a 3-axis accelerometer, which measures linear acceleration, into a single compact silicon die.

THE MECHANICS OF THE TDK INVENSENSE ICM-40609-D

A leading example of this technology is the TDK InvenSense ICM-40609-D. This sensor uses a CMOS-MEMS wafer-level bonding process to integrate mechanical structures directly with the readout electronics.

Operating Principle: A MEMS gyroscope primarily relies on the Coriolis effect, which describes the inertial force acting on an object moving within a rotating frame of reference. The sensor contains a proof mass that vibrates at high frequency along the drive axis.

When the device rotates, the Coriolis force causes the mass to move toward the sense axis, resulting in a displacement proportional to the rotation rate.

An integrated capacitive structure detects this movement by measuring changes in capacitance as the mass shifts. The on-chip electronics convert these changes into a voltage signal, which is processed to determine angular velocity.

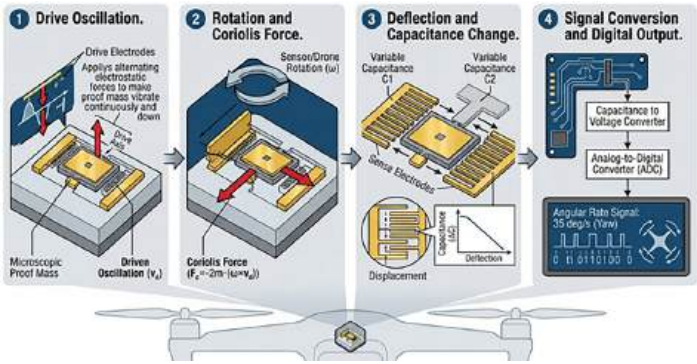


Figure 1: How a 6-Axis MEMS Inertial Measurement Unit (IMU) works? (AI Generated image)

WHY 16-BIT RESOLUTION MATTERS

The ICM-40609-D offers 16-bit resolution, ensuring precise digital conversion of motion data. In practical terms, this allows the flight controller to detect micro-drifts as small as 0.002°/s.

For an industrial drone performing a ten-minute inspection of a wind turbine, this resolution keeps drift imperceptible, allowing the camera to remain focused on a specific structural bolt or crack.

Key Technical Advantages:

- **Superior Sampling (32 kHz ODR):** It features a maximum Output Data Rate (ODR) of 32 kHz. This enables flight controllers to capture rapid movement data and identify anomalies or errors in real time that slower sensors may miss.
- **High-G Impact Tracking (±32g):** The accelerometer’s full-scale range is extended to ±32g, double the standard 16g found in many other IMUs. This allows drones to accurately track significant linear movements and high-acceleration maneuvers without clipping sensor data.
- **Thermal Stability:** Its custom architecture maintains high accuracy despite temperature shifts during extended flights. This ensures the flight platform remains stable as internal components heat up.
- **Vibration and Noise Management:** It features a low gyroscope noise floor (4.5 mdps/√Hz) and programmable digital filters that help the flight controller distinguish true motion from mechanical motor vibrations.



Figure 2: ICM-40609-D-6-Axis MEMS Motion Tracking for High-Precision Drone Stability and Flight Control from TDK

3. CORE TECHNOLOGY DEEP DIVE: HIGH-PRECISION OPTICAL ENCODERS

While the IMU tracks overall drone motion through the air, they cannot determine the exact position of mechanical subsystems like gimbals and precision actuators. This is where high-precision encoders become essential, particularly for gimbals and precision actuators.

CLOSING THE LOOP WITH THE BROADCOM HEDS-9140

An encoder is a feedback device that provides the exact angular position of a rotating shaft. The Broadcom HEDS-9140 is a 3-channel optical incremental encoder module. It utilizes a lensed infrared LED source and a precision code wheel to generate light pulses as the motor turns.

Operating Principle: A reflective incremental optical encoder includes an emitter, a detector, and a codewheel or codestrip. The emitter and detector are located on the same side of the codewheel or codestrip.

When light from the light source is projected onto the moving codewheel or codestrip, the bars act to reflect or not reflect the light, at intervals. This repeated action creates moving shadows that fall on the photodiodes located on the detector. The photodiodes then generates output or signal.

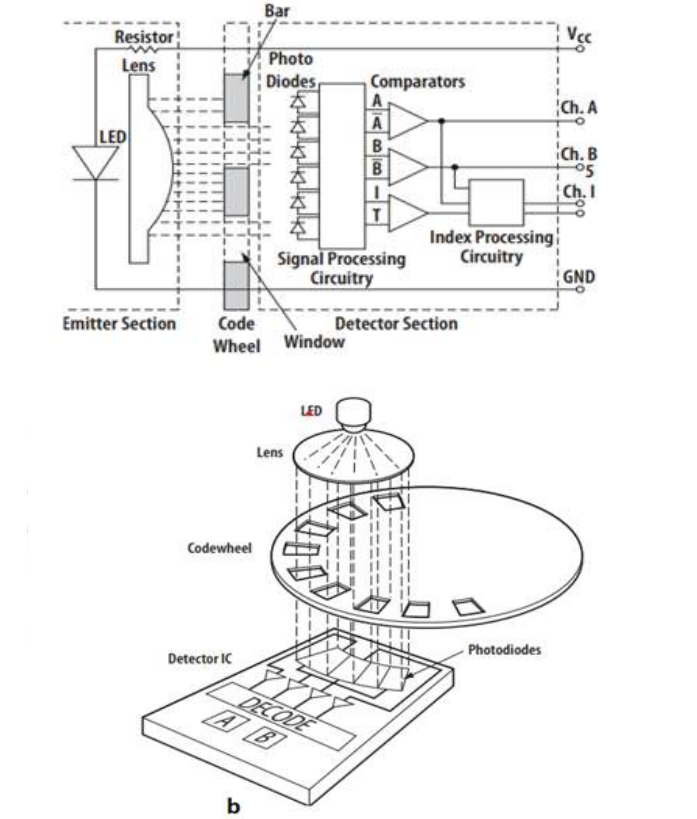


Figure 3: Working of an optical incremental encoder

THE PROBLEM WITH “OPEN-LOOP” GIMBALS

Without encoder feedback, motion systems operate on command rather than actual movement, creating a discrepancy where the controller “assumes” a position has been reached.

In entry-level drone gimbals, these open-loop motors are highly susceptible to aerodynamic drag, mechanical friction, and backlash, which frequently cause the motor to slip. Even a minor angular error of 2° at an altitude of 30 meters translates to a ground-level image displacement of over one meter—an inaccuracy that renders data for high-fidelity mapping or bridge inspection unreliable.

Transitioning to a closed-loop system by integrating an encoder, such as the HEDS-9140 which offers 500 Counts Per Revolution (CPR), ensures consistent and repeatable positioning. This feedback loop allows the controller to detect and correct physical deviations in real time, achieving positional accuracy better than 0.1° and providing the stability essential for professional imaging and precision aerial surveys.

TECHNICAL BENEFITS OF OPTICAL ENCODING:

- **Quadrature Signals:** It provides two-channel quadrature outputs (A, B) for direction and speed, plus a third-channel index pulse (Z). The index pulse allows the drone’s flight controller to detect the direction of rotation instantly.
- **Index Pulse:** Provides a “zero-point” reference for absolute home every time the drone powers up.
- **High Misalignment Tolerance:** It features a unique photodetector array and highly collimated light source that make it extremely tolerant to mounting misalignment. This is critical for drones, where vibration and mechanical stress can slightly shift components during flight.

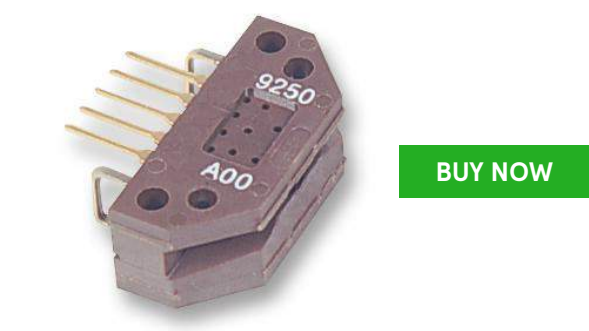


Figure 4: Broadcom HEDS-9140- Optical incremental encoders for detecting precise position of mechanical subsystems like gimbals and actuators in drones.

BUY NOW

4. SENSOR FUSION: THE INTELLIGENCE LAYER

No single sensor is perfect. Gyroscopes drift, accelerometers are noisy, and encoders context blindness they know where the shaft is but not where the horizon is. Individually, these sensors provide incomplete or noisy data. Reliable operation requires combining their strengths while compensating for weaknesses.

Sensor fusion, specifically the Extended Kalman Filter (EKF) widely considered the most effective method for drone operation because it overcomes the physical limitations of individual sensors by combining their data to reduce uncertainty.

The Extended Kalman Filter (EKF) is a critical algorithm used in drones (UAVs) for state estimation and sensor fusion, enabling stable flight and autonomous navigation by combining noisy sensor data into a reliable, real-time estimate of the drone’s orientation, velocity, and position.

HOW EKF FUSES DATA?

In industrial flight applications, a drone’s flight controller must continuously reconcile conflicting sensor inputs. Motor vibration, wind, and GNSS multipath errors introduce significant noise and uncertainty.

The EKF functions as a real-time probabilistic estimator, determining the drone’s most likely position, velocity, and orientation in the presence of these disturbances.

The EKF maintains a high-speed state vector **x**, which is recursively updated through two primary stages: prediction and correction.

The IMU drives the prediction phase by providing immediate, high-frequency motion data. When a disturbance occurs, such as a sudden tilt from wind, the gyroscope instantly detects the angular rate change.

EKF uses this data to project the drone’s next state within milliseconds, allowing the control system to respond to changes before slower sensors can and supporting real-time stabilization.

At the same time, optical encoders provide mechanical ground truth by reporting how actuators, such as gimbal motors, respond to control commands. When a gimbal is commanded to move by a specific angle, the encoder verifies if the motion is achieved.

Deviations from backlash, friction, or aerodynamic loading are detected immediately. EKF uses this feedback to correct actuation errors, keeping mechanical systems aligned with control objectives.

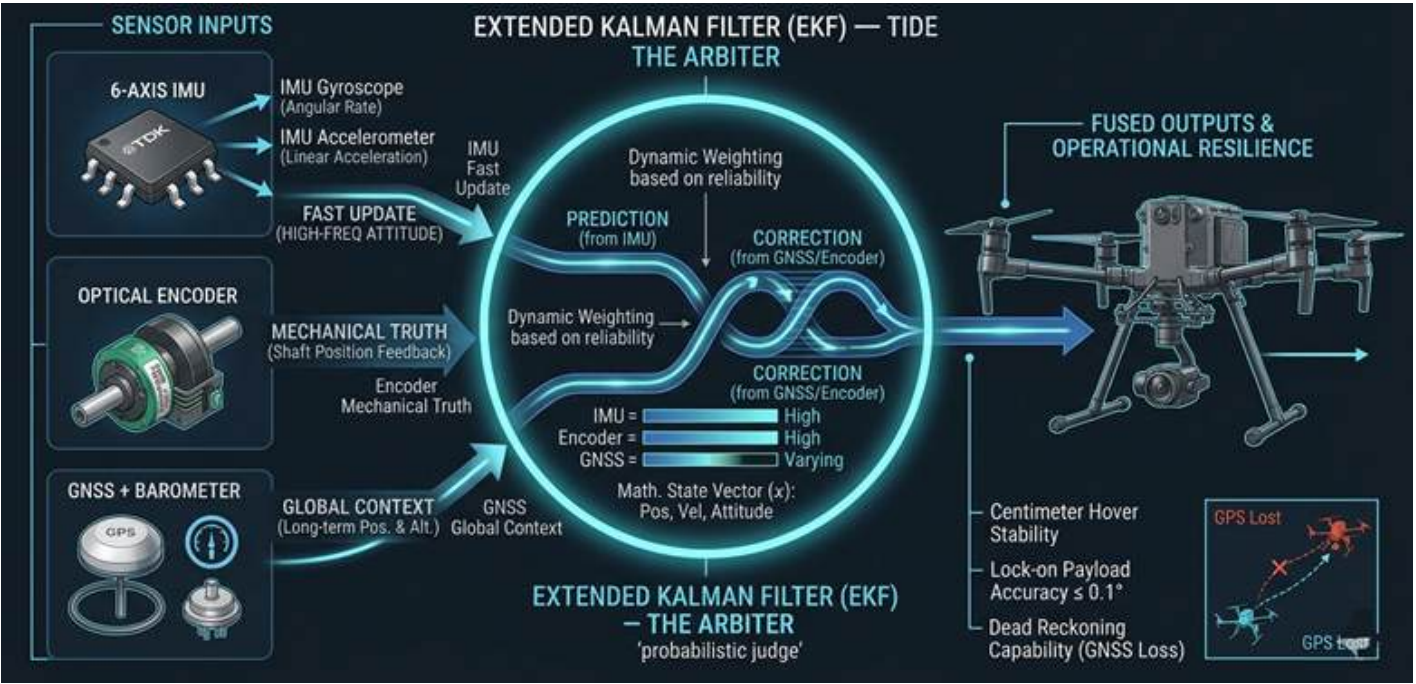


Figure 5: Extended Kalman Filter Sensor Fusion Architecture for Industrial UAVs (AI generated image)

For long-term reference, the EKF relies on GNSS for global position and barometric sensors for altitude. Although these signals are slower and more prone to noise or disruption, they are essential for anchoring the system to an absolute reference. The EKF uses these measurements during correction to limit drift from inertial estimation.

A key feature of the EKF is its ability to dynamically adjust the weighting of each sensor input using the Kalman Gain, which accounts for estimated noise. In high-vibration environments, for example, accelerometer data may become unreliable.

The EKF detects increased variance and reduces the influence of this data, relying more on gyroscope and encoder inputs. This ongoing rebalancing helps the system maintain stability as sensor conditions change.

This approach creates a resilient estimation framework. When external references like GNSS degrade due to obstructions, indoor operation, or electromagnetic interference, the EKF continues to operate by shifting to inertial and encoder-based estimation for dead reckoning.

By combining rapid inertial updates, precise mechanical feedback, and periodic global corrections, the EKF allows the drone to maintain stable flight and accurate control where single-sensor reliance would be insufficient.

5. INDUSTRIAL USE CASES AND OPERATIONAL EXCELLENCE

The integration of these high-precision components translates directly into operational advantages that ensure mission success in demanding sectors.

ENHANCING MISSION RELIABILITY

1. **Optimized Inspection Cycles:** In infrastructure inspection, high-resolution gimbals (enabled by encoders) ensure that the data is captured correctly the first time. This significantly reduces total inspection time and eliminates the need for repeated flights due to blurred or misaligned imagery.
2. **Fleet Scalability:** High-quality sensing is a prerequisite for BVLOS (Beyond Visual Line of Sight) certification. Drones that can demonstrate superior “Sense and Avoid” capabilities and orientation stability are more likely to meet the rigorous safety requirements of regulatory bodies.
3. **Extended Asset Life:** Industrial-grade components have a higher Mean Time Between Failure (MTBF). Using ruggedized sensors and connectors means fewer maintenance cycles and less operational downtime for the fleet.
4. **Precision Agriculture Accuracy:** Accurate path-following, driven by fused sensor data, ensures that spray-paths are followed precisely over large fields, reducing chemical waste and improving overall field coverage.

6. DESIGN AND SELECTION CHECKLIST (PRACTICAL GUIDANCE)

Use this checklist to evaluate motion sensors, encoders, and fusion readiness for industrial UAV designs:

IMU SELECTION

- Gyro noise density and bias stability (drift over mission time).
- Output data rate/bandwidth and filtering options for vibration rejection.
- Dynamic range is appropriate for both hover and aggressive maneuvers.
- Temperature range and bias compensation behavior.
- Interface and buffering (SPI/I3C, FIFO) to meet latency targets.

ENCODER SELECTION

- Counts per revolution (CPR) required for pointing resolution.
- Quadrature outputs (A/B) and index (Z) for direction + homing.
- Mechanical fit (shaft diameter, mounting) and misalignment tolerance.
- Electrical compatibility (supply, logic levels, connector pitch).

FUSION IMPLEMENTATION

- EKF or complementary filter selection based on compute budget and required accuracy.
- Calibration workflow (gyro bias, accelerometer scale/offset, encoder index homing).
- Sensor time synchronization and timestamping to avoid phase errors.
- Validation under vibration, temperature, and GNSS-degraded conditions.

7. COMPONENT SOURCING AND NEXT STEPS

Selecting sensors is only part of building a reliable platform. Engineers also need lifecycle-managed supply, documentation, evaluation hardware, and design-in support. Farnell and Newark provide access to multi-vendor motion sensors, encoders, dev kits, and supporting components needed to move from prototype to production.

Recommended “supporting components” to bundle with sensing designs:

- Power management (buck/boost, LDOs), EMI filtering, and low-noise references
- Connectors/cabling rated for vibration
- MCU/flight controller compute and timing resources
- Optional aiding sensors: barometer, magnetometer, GNSS, range sensors

CONCLUSION:

Future of industrial drones will be defined by intelligence, precision, and reliability. High-performance IMUs provide real-time motion awareness, precision encoders deliver accurate mechanical feedback, and sensor fusion combines both into a reliable, autonomous flight system. Together, these technologies form the foundation of the autonomous drone economy, enabling safer operations, greater accuracy, and scalable deployment across industrial applications.

Ready to accelerate your next UAV design? Explore Farnell’s range of drone technologies, sensors, connectivity, power, and development solutions at our Drone Applications page.

CLICK HERE

FAQS

1. What is sensor fusion in drones?

Sensor fusion in drones is the process of combining data from multiple sensors—such as IMUs, encoders, and GNSS—to produce a more accurate estimate of position, velocity, and orientation than any single sensor alone.

2. How does the Extended Kalman Filter work in drones?

The Extended Kalman Filter (EKF) works by predicting the drone’s state using high-frequency IMU data and correcting it using slower but absolute references like GNSS and barometers, while dynamically weighing sensor reliability.

3. Why is an IMU important for drone stability?

An IMU provides real-time measurements of angular velocity and acceleration, enabling the flight controller to detect and correct motion disturbances instantly, which is essential for maintaining stable flight.


4. What role do encoders play in drone systems?

Encoders provide precise feedback on actuator positions, such as gimbal angles or motor shafts, ensuring that commanded movements are accurately executed and eliminating mechanical errors.

5. What happens when GPS fails in a drone?

When GPS signals are unavailable, drones rely on IMU data and encoder feedback through sensor fusion algorithms like EKF to estimate position and maintain stable flight using dead reckoning.

NEXT-GEN ELECTRONIC SPEED CONTROLLERS (ESC) FOR DRONES: FROM BLDC CONTROL TO AI-OPTIMIZED FLIGHT PERFORMANCE

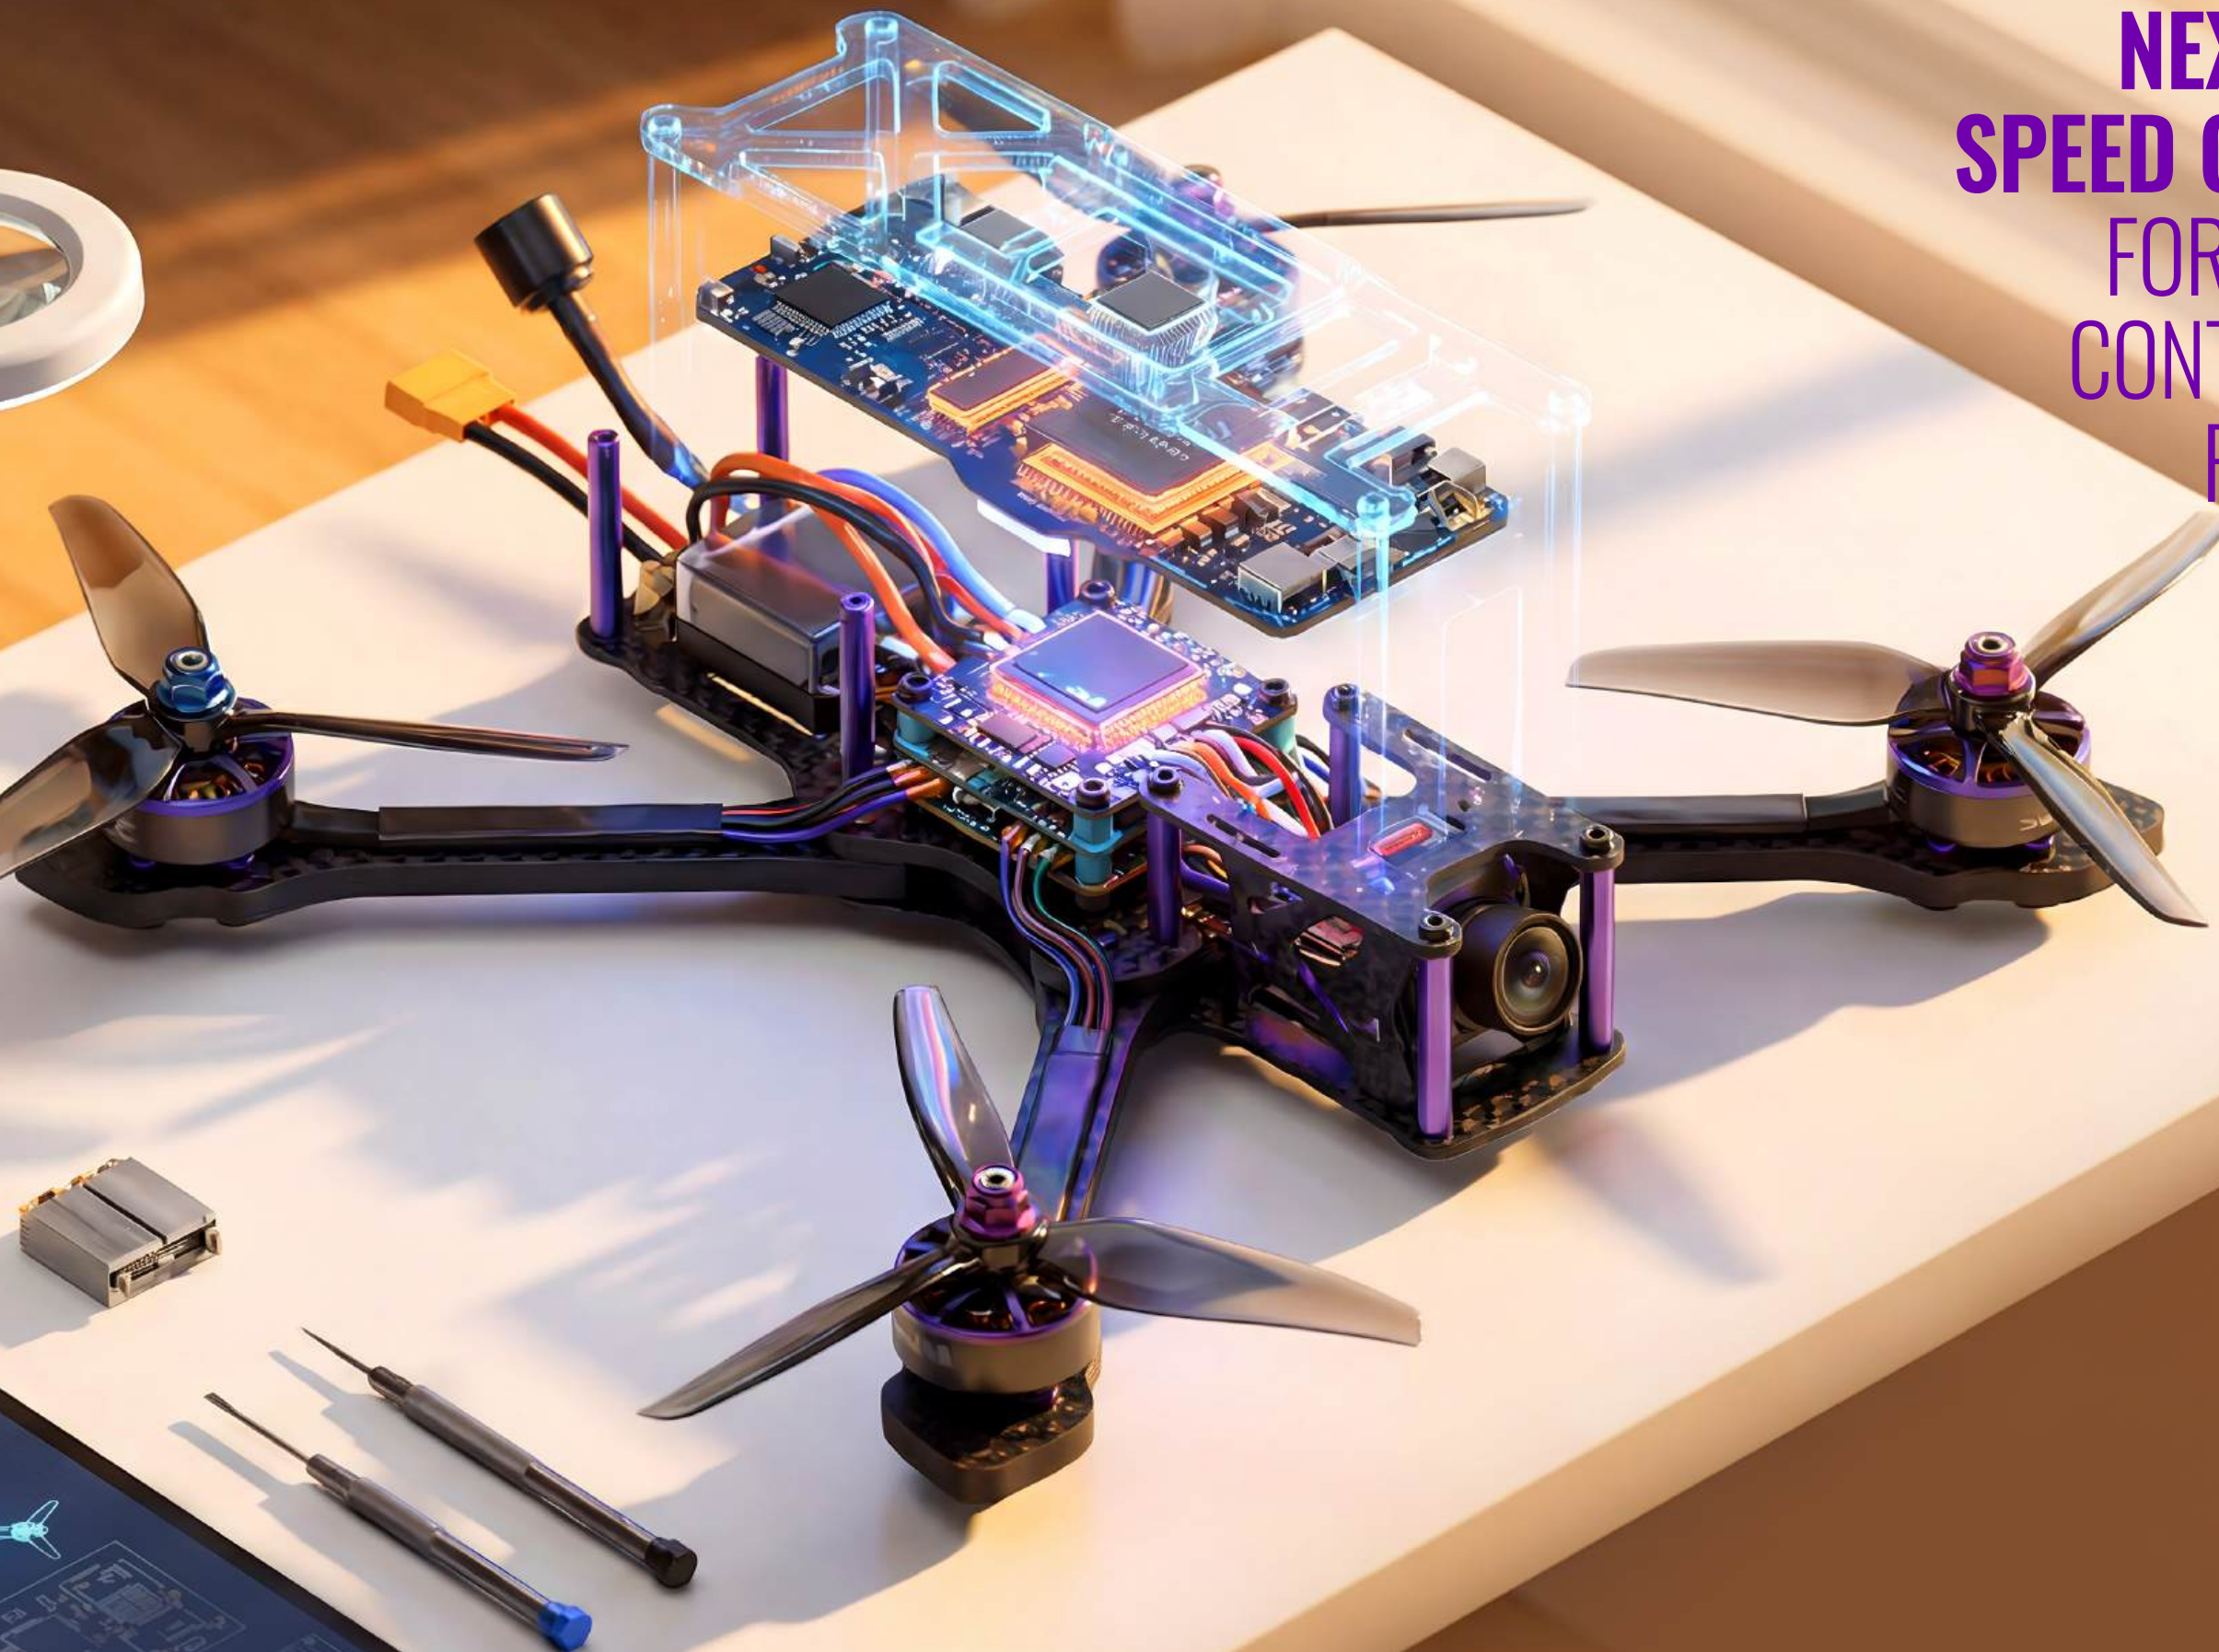

INTRODUCTION

Electronic Speed Controllers (ESCs) are essential for drone propulsion as they serve as the interface between the flight controller and the motor. Traditionally, ESCs were designed only to control motor speed via PWM signals. However, as drone applications progressed from consumer quadcopters to industrial inspection and delivery UAVs, ESCs matured into clever, high-efficiency power control systems.

Modern ESCs directly influence flight duration, maneuverability, noise levels, and system dependability. As drones demand greater efficiency and precision, ESC hardware is undergoing a shift driven by advanced semiconductor devices, real-time control systems, and embedded sensor technologies. This article explores how these modern ESCs for drones evolved and how they use AI technology to enhance their capabilities and perform complex tasks such as navigation, object recognition, and environmental analysis.

KEY ESC REQUIREMENTS FOR DRONE APPLICATIONS

ESC is an electronic circuit that connects the motor, the battery, and flight controller. The primary purpose of the ESC is to change the speed and direction of the drone (figure-1).

Due to the difference in motor technology, the flight controller of drones with brush and brushless motors cannot communicate directly with the motors. The ESC helps establish a connection, allowing the drone to control and regulate the speed of the motors in flight.

1. HIGH FREQUENCY MOTOR CONTROL

ESCs should support high PWM switching frequencies (typically 24–48 kHz or higher).

This enables:

- Smoother motor operation
- Reduced torque ripple
- Quieter acoustic performance
- Improved flight stability, especially for camera and gimbal equipped drones

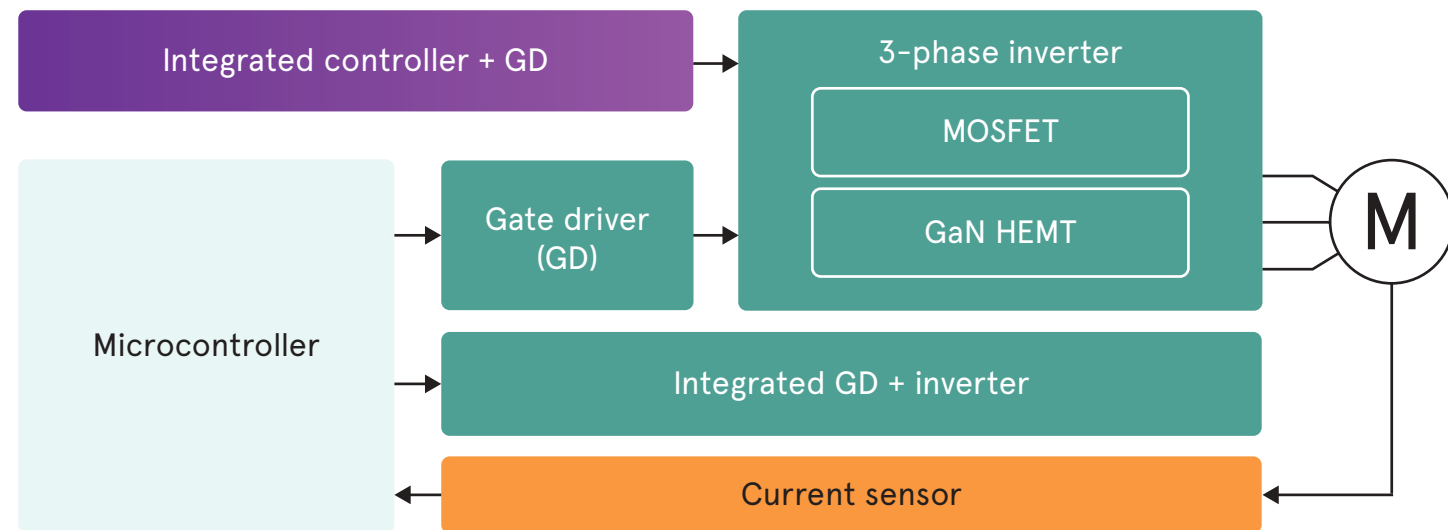


Figure 1: ESC Motor drive block diagram

2. FAST THROTTLE RESPONSE AND LOW LATENCY

Rapid throttle response with minimal control latency is essential for:

- Precise maneuvering
- Improved pilot handling and agility
- Stable autonomous flight control
- Safer operation in dynamic or obstacle dense environments

Low latency ESCs allow quick motor speed adjustments, which are critical during aggressive flight maneuvers and sudden load changes.

3. EFFICIENT POWER ELECTRONICS

High efficiency ESCs rely on optimized power stage design, including:

- Careful MOSFET selection with low RDS (on)
- Optimized gate driver circuitry
- Minimal switching and conduction losses

This improves overall flight time, minimizes heat generation, and lowers the risk of component failure under continuous load.

4. ROBUST PROTECTION FEATURES

To protect the drone and its propulsion system, ESCs must incorporate comprehensive safety mechanisms such as:

- Over current protection
- Over temperature protection
- Undervoltage and overvoltage protection

These features protect motors, batteries, and power electronics under extreme operating conditions, enhancing overall aircraft safety and system durability.

5. EMI MINIMIZATION AND CLEAN ELECTRICAL DESIGN

Effective electromagnetic interference (EMI) control is crucial in drone systems. A clean ESC electrical design:

- Reduces noise that can interfere with onboard sensors
- Prevents disruption of radio, GPS, and communication systems
- Improves system stability and signal integrity
- This is especially important in AI enabled and sensor heavy UAV platforms.

6. COMPACT AND LIGHTWEIGHT PACKAGING

ESCs must be small, lightweight, and thermally efficient to fit into compact airframes. Reduced size and weight:

- Increase available payload capacity or extend flight time
- Simplify installation and cable routing
- Enable tighter mechanical integration in multi motor designs

THE ROLE OF INTELLIGENCE AND AI IN NEXT GENERATION ESCS

Artificial Intelligence (AI) has enabled a shift from manually operated UAVs to autonomous, intelligent aerial systems. While traditional drones rely heavily on human input, AI powered drones can sense, analyze, decide, and act independently, unlocking advanced capabilities across multiple industries.

As drone applications become increasingly autonomous and task oriented, modern ESCs play a crucial role in determining flight efficiency, maneuverability, acoustic noise levels, and operational reliability. They now contribute beyond propulsion control.

Driven by advancements in power semiconductor technology, real time motor control architectures, and embedded sensing, ESCs now deliver precise torque control, reduced power losses, and enhanced system responsiveness.

Emerging designs incorporate AI assisted control strategies and richer telemetry, enabling drones to perform numerous complex tasks, including:

- Autonomous navigation and trajectory optimization
- Object recognition and payload stabilization
- Environmental analysis and adaptive flight behavior

By combining real time motor control with intelligent data processing, ESCs are becoming an integral part of the drone's decision making ecosystem rather than a passive power stage.

FROM MANUAL CONTROL TO AUTONOMOUS INTELLIGENCE

AI enables drones to process vast amounts of real time data and arrive at decisions without constant human intervention.

By integrating machine learning, computer vision, and real time analytics, AI transforms drones from simple remote controlled devices into intelligent tools capable of executing complex missions. These capabilities include autonomous navigation, object recognition, environmental monitoring, and adaptive flight behavior.

AI drones are unmanned aerial vehicles (UAVs) equipped with onboard intelligence that allows them to operate autonomously or semi autonomously. Using AI algorithms, these drones can:

- Perform real time decision making
- Detect and avoid obstacles
- Optimize mission paths
- Respond dynamically to changing environments

HOW AI WORKS INSIDE DRONES

Drone AI technology integrates multiple hardware and software components, such as sensors, cameras, and onboard processors, to create an end to end intelligent system. Together, these components enable drones to:

- Collect data from their environment using cameras, IMUs, LiDAR, and other sensors
- Process and analyze data using AI and machine learning algorithms
- Make decisions or take actions based on extracted insights
- Adapt to dynamic conditions using trained models that improve performance over time

This learning capability allows drones to continuously refine their behavior, improve efficiency and accuracy in real world conditions. AI gives drones the ability to “learn” and make intelligent decisions.

Modern drones, by integrating machine learning algorithms and computer vision, can autonomously conduct several tasks including surveillance, inspection, and security monitoring.

These systems can identify anomalies, track objects, and detect potential threats or emergency situations in real time. This autonomy is particularly valuable when drones must operate in complex or hazardous environments where human control may be limited or unsafe.

OpenCV plays a critical role in enabling real time computer vision for AI powered drones. By processing large volumes of visual data efficiently, OpenCV allows drones to understand and respond to their surroundings instantaneously.

Key benefits of OpenCV in drones include:

- Real time obstacle detection and avoidance
- Object recognition and tracking
- Scene understanding for navigation and mapping

These capabilities are essential for drones operating in environments that require rapid perception and instantaneous response. Additionally, OpenCV’s real-time processing is advantageous for drones employed in industrial and manufacturing environments.

These drones can fly over vast industrial buildings or power lines, capturing 720p camera pictures and movies that can be instantly processed to identify structural problems or maintenance requirements. The use of OpenCV in drones has also made it easier to create 3D models of buildings and landscapes from numerous photos taken from various perspectives.

COMMON ESC COMMUNICATION PROTOCOLS

ESCs rely on defined communication protocols to receive throttle and control commands from a flight controller (FC). These protocols have evolved significantly over time in response to the increasing performance, efficiency, and reliability demands of modern drones. Broadly speaking, ESC communication protocols can be boxed into two main categories: analog (PWM based) protocols and digital protocols.

Early ESCs relied on analog PWM based signaling, where throttle information was encoded using pulse width timing. Standard PWM was slow and introduced latency, leading to faster variants such as OneShot125, OneShot42, and MultiShot. These protocols dramatically reduced pulse widths and increased update frequency, improving throttle response. However, they remained timing based analog signals and were highly susceptible to electrical noise, clock jitter, and signal integrity issues, making them unreliable in electrically noisy drone environments.

DSHOT: THE MODERN STANDARD

The limitations of analog PWM protocols led to the development of DShot (Digital Shot), which is now the most widely used ESC protocol in modern drones. Instead of encoding throttle commands in pulse widths, DShot transmits digital data packets that include error checking via CRC.

This approach provides greater noise immunity, eliminates the need for ESC calibration, and supports higher command update rates. Digital protocols also enable ESC telemetry, allowing real time feedback such as RPM, current, voltage, and temperature, which improves flight control, filtering, and system diagnostics.

Common DShot variants include:

- DShot300 (300 kbps): widely used, very stable
- DShot600 (600 kbps): higher update rate for fast dynamics
- DShot1200 (1.2 Mbps): used in racing drones and very fast control loops

Modern ESCs are not just power converters; they are intelligent motor controllers. With digital protocols, ESCs can transmit telemetry such as Motor RPM, Phase current, ESC temperature, Battery voltage, Fault or protection flags. This feedback enables advanced flight control features such as RPM filtering, improved noise suppression, adaptive control algorithms, and predictive fault handling.

Telemetry has become particularly important in AI assisted and autonomous drones where situational awareness and system health monitoring are critical. DShot combined with telemetry is currently the de facto standard in high performance consumer and prosumer drones.

CAN-BASED ESC COMMUNICATION

Protocols such as UAVCAN / DroneCAN operate over a CAN bus, enabling deterministic, faulty tolerant communication between multiple ESCs and flight controllers. These systems support Addressable ESCs, Redundancy, Robust error handling, Synchronization across motors. CAN based ESCs protocol are common in industrial inspection drones, heavy lift platforms, certified UAV and safety critical UAV platforms.

CONCLUSION:

Modern ESCs have evolved from simple motor controllers into intelligent propulsion systems that improve efficiency, responsiveness, reliability, and autonomous flight performance. As drones become smarter and more autonomous, advanced ESCs will play an increasingly critical role in enabling precision control, real-time telemetry, and AI-driven decision making. Explore the latest drone technologies, power solutions, connectivity, and development platforms at our Drone Applications page.

[CLICK HERE](#)


Lightweight, High Performance, All Weather Thermoplastic Connectors

Amphenol Sine Systems' AT Series™ connectors are a lightweight, high-performance, IP68 and IP69K rated (in mated condition), thermoplastic, cost-effective solution with superior environmental seals and seal retention capabilities.

The connector design incorporates an integral latching system that ensures a definitive electrical and mechanical connection. All our AT Series™ connectors offer a wide range of boot, cap, and clip accessories and have been developed to be compatible with all other existing standard products industry-wide. Custom color options are available based on your specific needs.

- Available in 2, 3, 4, 6, 8, 12, 13 (Mixed), 15 (Mixed) & 18 pos.
- 250V Max Voltage / 13-25A Range

AT ATSeries™

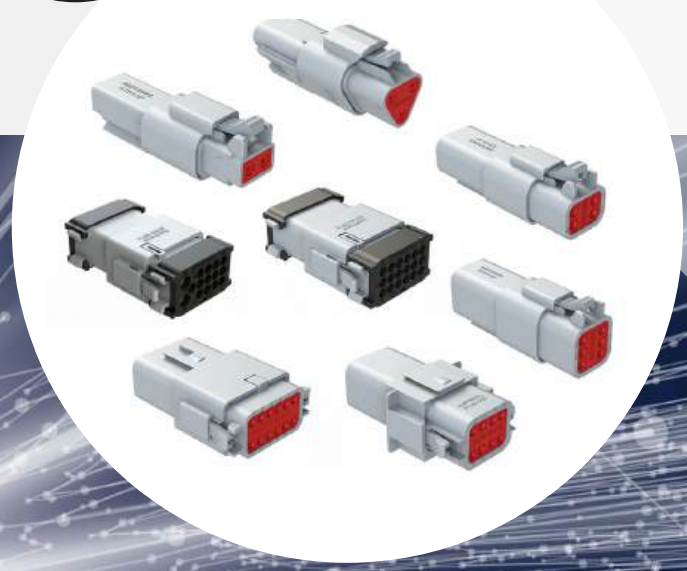

Available in the following options:

- AT ATSeries™ LED
- AT ATSeries™ SR01/02
- AT ATSeries™ Cable Assemblies
- AT Integrated Resistors&Diodes
- BL BoardLock™ AT
- HB HYPERBUSS™ AT
- PM PanelMate™ AT
- SP Structure+™ AT

EXPLORE MORE

Let's Move ForwardTogether!

PANDUIT™

infrastructure for a connected world

Engineered to Hold when Vibration won't Stop

Panduit Fastening & Cable Management Solutions for Drone and UAV Systems
Built for Vibration. Proven by Standards. Trusted by Engineers.

Engineered Quality from a Single Trusted Partner

Panduit fastening solutions are **engineered for dynamic, vibration intensive environments**, helping protect performance, safety, and long term reliability across the UAV lifecycle.

Barb Ty® Cable Ties
Higher tensile strength than conventional cable ties.
► Shock & vibration tested
► Secure under movement



MLT Stainless Steel Ties
Stainless steel cable ties featuring a unique locking mechanism Balllock design.
► Unique vibration resistance
► Long term security



Edge Clips
Provide a robust, metal retention solution for fastening cables to frames and panels.
► Metal retention
► No drilling
► EN61373 tested



Nylon 612 Cable Ties
► 20 year service life
► Durable
► Excellent chemical resistance, and reduced moisture absorption.



Ideal for UAV applications requiring durability over extended operational lifecycles.

PANDUIT™ – Making the Connections that Matter

EXPLORE MORE

panduit.com